The Window and Door Master Specialist



Casement and Awning Windows






- Sash with alignment supporting skates.
 Unique in the industry.
- ➤ Rigid all PVC monocoque frame, fusion welded for superior strength.
- ▶ Multi-chamber frame and sash profiles for greater thermal insulation.
- → ½" (12,7mm) and ¾" (19mm) cavities integrated to the interior frame.
- ▶ Slot to insert metal anchoring bracket.
- ➤ Three weatherstrips integrated to the frame, offering a greater wind-load and water resistance.
- 7/8" (22.2mm) double sealed unit;
 1 ¼" (31.4mm) triple sealed unit in option.
- ➤ Removable fibreglass screen with enamelled aluminum frame, overlapping the opening for a stylish look and a greater barrier.
- Standard folding crank handles.
- ▶ 90° opening mechanism for easy cleaning from the interior.

Performance

► A3 - B7 - C5.

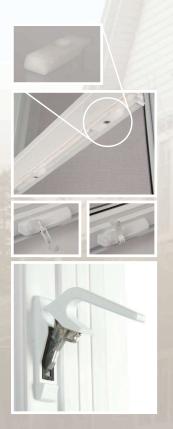



Hung Window





- Rigid all PVC monocoque frame, fusion welded for superior strength.
- ➤ Multi-chamber frame and sash profiles for greater thermal insulation.
- ▶ Sash tilt in for easy maintenance
- Operating sash with Omega heavy-duty stainless steel mechanism.
- ➤ Three weatherstrips integrated to the frame, offering a greater wind-load and water resistance.
- Double sealed unit with nonconducive ultra performing spacer.
 Available in various types of glazing.
- ➤ Fibreglass screen with white aluminum frame.
- Heavy-duty lock for enhanced security.

Performance

➤ A3 - B7 - C4.





Sliding Window





- ➤ Rigid all PVC monocoque frame, fusion welded for superior strength.
- Multi-chamber frame and sash profiles for greater thermal insulation.
- Sash located inside the insulated section of the wall for better energy efficiency.
- Operating sash with tandem ball bearing rollers for smooth operation.
- Double sealed unit with nonconducive ultra performing spacer.
 Available in various types of glazing.
- Fibreglass screen with enamelled aluminum frame.
- Triple weatherstrip integrated to the frame, offering a greater wind-load and water resistance.
- Heavy-duty lock for exceptional security.
- Triple weatherstrip applied around the sash with double weatherstrip at the meeting rail for maximum performance.

Performance

▶ A3 - B7 - C4.





Standard window system





